


XTRAVAC

Providing Quality with Economical Solutions

XtraVac • ST6

Dip-Style Shrink Tank

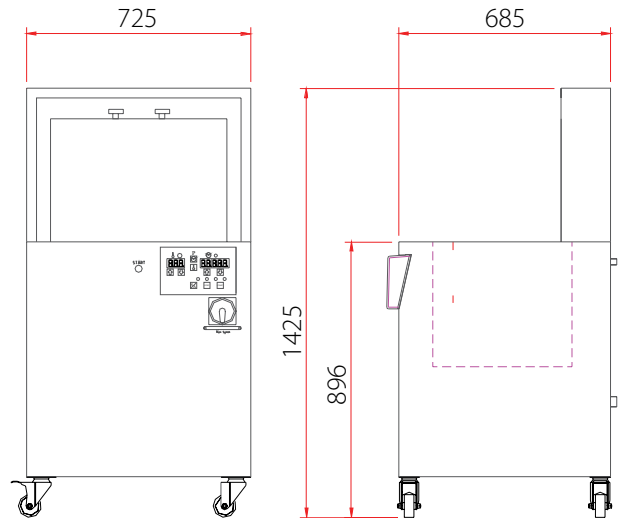

Machine Information XtraVac ST6

Machine Material	All Stainless
Machine on wheels	Standard
Machine Dimensions	28.5 x 26.9 x 56 in
Platform Dimensions	711 x 685 x 1425 mm
.	24 x 16 in
.	610 x 406 mm
Machine controls	Digital/Programmable
Product Size Max	24 x 16 x 10 in
.	610 x 406 x 254 mm
Dipping Time	Variable 1-999 Sec.
Water Volume	84 L / 23 GAL
Water Connection OD	0.5 in NPTM
Water Outlet IN	1 in NPTF
Machine weight	110 kg / 242 lbs
Electrical Connection	220 V 3 ph/60hz, (optional 400 V 3 ph/50hz)
Electrical Heating	12 KW
Shipping Weight	159 kg / 350 lbs
Shipping Dimension	34.6 x 32.6 x 47.6 in
.	880 x 830 x 1210 mm

FEATURES & BENEFITS:

XtraVac ST6 Shrink Tank is the ideal companion for single or double chamber machines. This stainless steel Semi-Automatic dip tank is perfect for small to medium packaging operations for many products.

- *Improve product appearance and retail presentation*
- *Simple controls for easy use*
- *Water overflow control system*
- *Energy savings from double-wall insulation*
- *Compact design fits even small footprints*
- *Automatic and accurate temperature control*
- *Steam cover lid included*
- *12-month warranty*

XTRAVAC

Providing Quality with Economical Solutions

A Division of the Inauen Group · Kansas City, MO
Tel. 800-728-2999 · Sales@XtraVac.com