
## Model RL Ring Lifter Model FP1000 Feed Screw Puller

AM2C<sup>®</sup> Beehive<sup>®</sup> Cashin<sup>®</sup> Formax<sup>®</sup> TST<sup>®</sup> Weiler<sup>®</sup> ©2011 Provisur<sup>®</sup> Technologies

**PROVISUR**<sup>®</sup>

**TECHNOLOGIES** 

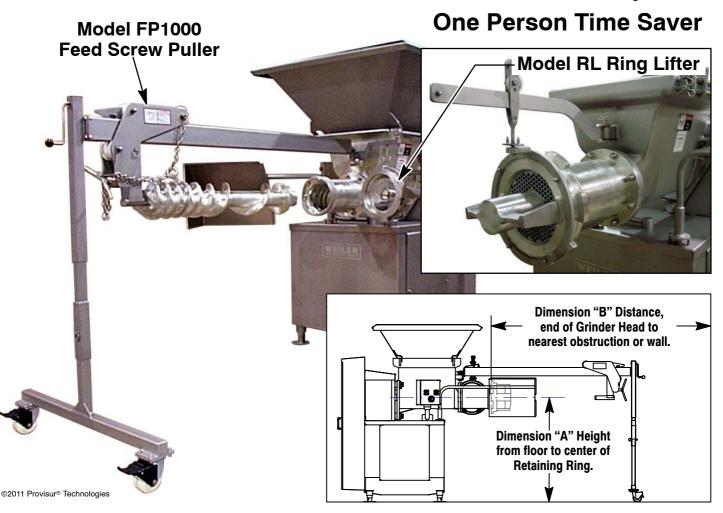

## Standard RL Ring Lifter Advantages:

- 1. Available for all Weiler <sup>®</sup>8–5/8", 11", 16" Grinders, AG's & MG's.
- 2. Allows easy removal of grinder ring without risk of dropping.
- 3. Saves wear and tear on grinder head and ring.
- 4. Easier to engage threads.

## Standard FP1000 Advantages:

- 1. Available for all floor mounted Weiler ® 8–5/8", 11", 16" Grinders, AG's & MG's.
- 2. Eliminates damage to feed screw and head upon removal and installation of the feed screw.
- 3. Easy to install, adjust and use.
- 4. Please furnish discharge height ("A") of your grinder(s) and space between end of grinder head and nearest obstruction ("B").



1116 East Main Street • Whitewater, Wisconsin 53190-2103, USA 262-473-5254 • 800-558-9507 • Fax 262-473-5867

Grinder Model Number	Grinder Serial Number	DIMENSIONS	
		" <b>A</b> "	"B"

 $\ast$  For additional information and firm prices, please contact Provisur <sup>®</sup> Technologies.



11814 Election Road ● Suite 140 ● Draper, UT 84020 USA Tel: 801–561–4211 ● Fax: 801–562–5857

www.weilerinc.com • weilerinfo@provisur.com • www.provisur.com