

# INPACK™ 'S' SERIES

Model S30, S45, S60, S90X



## PREFORMED TRAY SEALING MACHINE

For Modified Atmosphere Packaging



### 'S' Series

- **Seal Integrity** – Time, Temperature, and Pressure are all monitored and controlled to provide consistent seals you can depend on.
- **Sanitation** – Stainless Steel Washdown Design
- **Speed** – Servo Drive Indexing System
- **Savings** – Contoured filler plates for minimum gas usage and unique film cradle design to minimize film waste.
- **Solid** – Heavy Duty Construction Design, Including Over-Center, Die Closing System
- **Serviceability** – Full-color, user-friendly, programmable touch screen control with multi-language support. Fast, easy changeover design for converting from one package size to the next.



# INPACK™ 'S' SERIES




## OPTIONS

- Registration for printed film.
- Date Coders and Labelers
- Online Gas Analyzer
- Tray De-Nester
- Portioning Equipment
- Extended Product Loading Area
- Automatic Tray Loader (shown below)



The ROSS Advantage Is...  
**THE BEST FILM UTILIZATION & LOWEST GAS CONSUMPTION, GUARANTEES THE LOWEST PACKAGE COST!**

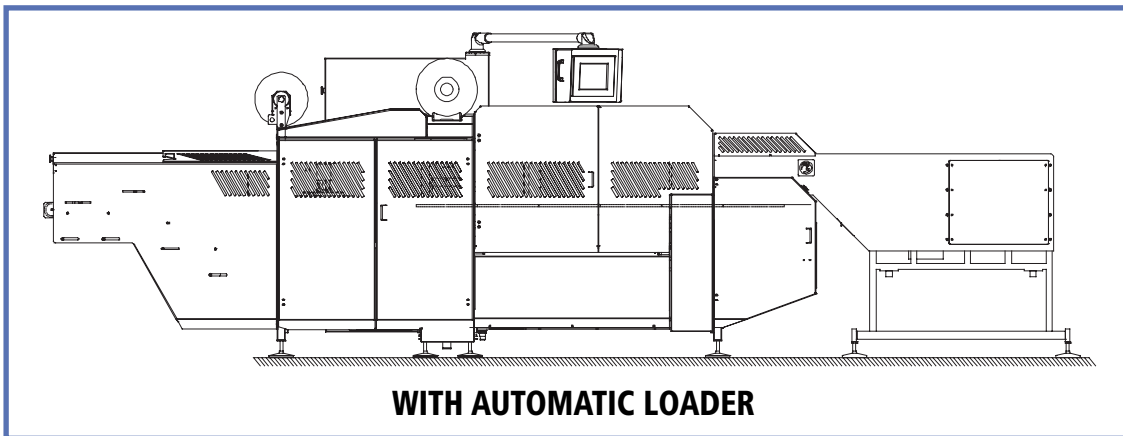

## Utilities Requirements

Electrical: 208-575V • 3Ph • 50/60 Hz

Water: 114 Liters/Hour (30 Gallons/Hour)

Air: 566 Liters/Minute (20 CFM)

## Machine Dimensions

Length: 4,796 mm (188.8") available to 8,608 mm (338.8")

Width: S30 1,091 mm (42.95"), S45 1,288 mm (50.71"), S60 & S90X 1,491 mm (58.71")

Height: 2,000 mm (78.75") Height



Ross Industries Packaging Division  
5321 Midland Road  
Midland, VA 22728

540-439-3271 • 540-439-2740 Fax  
www.rossindinc.com  
E-mail: sales@rossindinc.com

## Represented by:

**Robert Reiser & Co., Inc.**  
725 Dedham Street  
Canton, MA 02021 USA  
(Corporate Office)  
**TEL** (781) 821-1290  
**FAX** (781) 821-1316  
sales@reiser.com

**Reiser (Canada) Ltd.**  
945 Gateway Drive  
Burlington, ONT  
L7L 5K5 Canada  
**TEL** (905) 631-6611  
**FAX** (905) 631-6607

**Reiser (UK) Ltd.**  
Maidstone Road Kingston,  
Milton-Keynes MK10 0BD  
United Kingdom  
**TEL** 44 (0) 1908 585 300  
**FAX** 44 (0) 1908 585 400